

GAQ65D12

DC-DC Converter Technical Manual V1.7

Quarter-Brick DC-DC Converter	36 - 75 V Input	± 12 V/2.7 A Output	65 W Power	Negative Logic
----------------------------------	-----------------	----------------------------	------------	-------------------

Description

The GAQ65D12 is a new generation isolated DC-DC converter that uses an industry nonstandard quarter-brick structure, and features high efficiency and power density, operates from an input voltage range of 36 V to 75 V, provides the rated output voltage of ± 12 V and the rated output power of 65 W.

Operational Features

- Input voltage: 36 - 75 V
- Output current: 0.27 - 2.7 A (± 12 V)
- Output ripple and noise: 75 mV (± 12 V, 0.27 - 2.7 A)
- Efficiency: 90.0% (± 12 V, 2.7 A)

Mechanical Features

- Industry nonstandard quarter-brick (L x W x H): 57.9 mm x 36.8 mm x 10.2 mm (2.28 in. x 1.45 in. x 0.40 in.)
- Weight: about 38 g

Protection Features

- Input undervoltage protection
- Output overcurrent protection (hiccup mode)
- Output short circuit protection (hiccup mode)
- Output overvoltage protection (hiccup mode)
- Overtemperature protection (self-recovery)

Control Features

- Remote on/off
- Output voltage trim

Safety Features

- UL60950-1 and CSA C22.2 No. 60950-1-07
- Meet UL94V-0 flammability requirements
- RoHS6 compliant



GAQ65D12

GAQ65D12

DC-DC Converter Technical Manual V1.7

Designation Explanation

GAQ 65 D 12
1 2 3 4


- 1 — 48Vin, high performance, analog control nonstandard quarter-brick
- 2 — Output power: 65 W
- 3 — Double output
- 4 — Output voltage: ± 12 V



NOTE

PW11QRAR on the label of the module is the internal model used by the manufacturer.

Mechanical Diagram

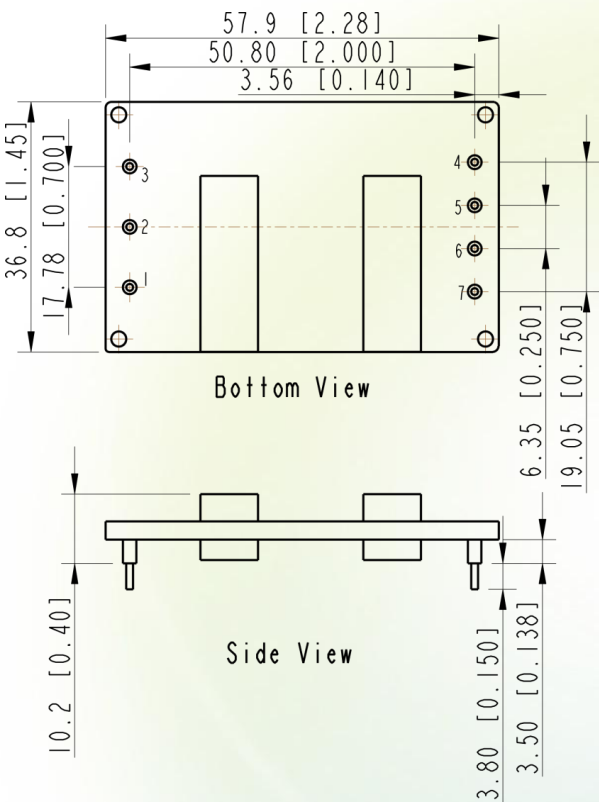

Pin Description

Pin No.	Function
1	$V_{in} (+)$
2	On/Off
3	$V_{in} (-)$
4	$V_{out2} (-12 V)$
5	COM
6	Trim
7	$V_{out1} (+12 V)$



NOTE

- All dimensions in mm [in.]
Tolerances: $x.x \pm 0.5$ mm [$x.xx \pm 0.02$ in.]
 $x.xx \pm 0.25$ mm [$x.xxx \pm 0.010$ in.]
- Pin 1-7 are 1.00 ± 0.05 mm [0.040 ± 0.002 in.] diameter with 2.00 ± 0.10 mm [0.080 ± 0.004 in.] diameter standoff shoulders.

GAQ65D12

DC-DC Converter Technical Manual V1.7

Electrical Specifications

Conditions: $T_A = 25^{\circ}\text{C}$ (77°F), Airflow = 1 m/s (200 LFM), $V_{in} = 48\text{ V}$, unless otherwise notes.

Parameter	Output	Min.	Typ.	Max.	Units	Notes & Conditions
Absolute maximum ratings						
Input voltage						
Continuous	-	-	-	80	V	-
Transient (100 ms)	-	-	-	100	V	-
Operating ambient temperature	-	-40	-	85	$^{\circ}\text{C}$	See the thermal derating curve
Storage temperature	-	-55	-	125	$^{\circ}\text{C}$	-
Operating humidity	-	5	-	95	% RH	Non-condensing
Input characteristics						
Operating input voltage	-	36	48	75	V	-
Maximum input current	-	-	-	2.7	A	$V_{in} = 36\text{ V}$; $I_{o1} = 2.7\text{ A}$; $I_{o2} = 2.7\text{ A}$
No-load loss	-	-	-	1.3	W	$V_{in} = 48\text{ V}$; $I_{o1} = 0\text{ A}$; $I_{o2} = 0\text{ A}$
Input capacitance	-	100	-	-	μF	Aluminum electrolytic capacitor
Inrush transient	-	-	-	1	A^2s	-
Input reflected ripple current (peak to peak)	-	-	-	30	mA	Oscilloscope bandwidth: 20 MHz
Output characteristics						
Output voltage set point	12 V	12.0	12.1	12.2	V	$V_{in} = 48\text{ V}$; $I_{o1} = I_{o2} = 2.7\text{ A}$
	-12 V	-12.0	-12.1	-12.2	V	$V_{in} = 48\text{ V}$; $I_{o1} = I_{o2} = 2.7\text{ A}$
Output power	$\pm 12\text{ V}$	0	-	65	W	$V_{in} = 36 - 75\text{ V}$; $I_{o1} = I_{o2} = 2.7\text{ A}$
Output line regulation	$\pm 12\text{ V}$	-	-	± 0.3	%	$V_{in} = 36 - 75\text{ V}$; $I_{o1} = I_{o2} = 2.7\text{ A}$
Output load regulation	12 V	-	-	± 0.5	%	$V_{in} = 48\text{ V}$; $I_{o1} = 0.27 - 2.7\text{ A}$; $I_{o2} = 2.7\text{ A}$
Across adjustment rate	$\pm 12\text{ V}$	-	-	± 2	%	$I_{o1} = 0.27\text{ A}$; $I_{o2} = 1.2 \times 10\% I_{o\text{max}}$ or $I_{o1} = 2.7\text{ A}$; $I_{o2} = 0.8 \times I_{o\text{max}}$
Regulated voltage precision	$\pm 12\text{ V}$	-	-	± 3	%	$V_{in} = 36 - 75\text{ V}$; $I_{out} = 0.27 - 2.7\text{ A}$
Temperature coefficient	$\pm 12\text{ V}$	-	-	± 0.02	$\%/^{\circ}\text{C}$	$T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ (-40°F to $+185^{\circ}\text{F}$)
External capacitance	$\pm 12\text{ V}$	470	-	2200	μF	470 μF : solid aluminum electrolytic capacitor

GAQ65D12

DC-DC Converter Technical Manual V1.7

Electrical Specifications

Conditions: $T_A = 25^{\circ}\text{C}$ (77°F), Airflow = 1 m/s (200 LFM), $V_{in} = 48\text{ V}$, unless otherwise notes.

Parameter	Output	Min.	Typ.	Max.	Units	Notes & Conditions
Output characteristics						
Output current	±12 V	0.27	-	2.7	A	-
Output ripple and noise (peak to peak)	±12 V	-	-	75	mV	Oscilloscope bandwidth: 20 MHz See BD and CD point of Figure 7
Output voltage Trim range	12 V	80	-	110	%	-
Output voltage overshoot	±12 V	-	-	±5	%	The whole range of V _{in} , I _{out} and T _A
Output voltage delay time	±12 V	-	-	200	ms	From V _{in} connection to 10% V _{out}
Output voltage rise time	±12 V	-	-	20	ms	From 10%V _{out} to 90%V _{out}
Switching frequency	-	-	250	-	kHz	-
Protection characteristics						
Input undervoltage protection						
Startup threshold	-	31	-	36	V	-
Shutdown threshold	-	30	-	35	V	-
Hysteresis	-	1	-	3	V	-
Output overcurrent protection	±12 V	3.2	-	6.0	A	Hiccup mode
Output short circuit protection	-	-	-	-	-	Hiccup mode
Output overvoltage protection	±12 V	14.0	-	16.6	V	Hiccup mode
Overtemperature protection						Self-recovery
Threshold	-	115	125	135	°C	The values are obtained by measuring the temperature of the hottest power component on the top surface of the convertor.
Hysteresis	-	5	-	-	°C	
Dynamic characteristics						
Overshoot amplitude	All	-	-	600	mV	Current change rate: 0.1 A/μs load : 25% - 50% - 25%; 25% - 50% - 25%
Recovery time		-	-	300	μs	
Overshoot amplitude	All	-	-	600	mV	Current change rate: 1 A/μs load : 25% - 50% - 25%; 50% - 75% - 50%
Recovery time		-	-	300	μs	

GAQ65D12

DC-DC Converter Technical Manual V1.7

Electrical Specifications

Conditions: $T_A = 25^{\circ}\text{C}$ (77°F), Airflow = 1 m/s (200 LFM), $V_{in} = 48\text{ V}$, unless otherwise notes.

Parameter	Output	Min.	Typ.	Max.	Units	Notes & Conditions
Efficiency						
100% load	-	88.0	90.0	-	%	$V_{in} = 48\text{ V}$; $I_{o1} = 2.7\text{ A}$; $I_{o2} = 2.7\text{ A}$
50% load	-	86.0	89.0	-	%	$V_{in} = 48\text{ V}$; $I_{o1} = 1.35\text{ A}$; $I_{o2} = 1.35\text{ A}$
Isolation characteristics						
Input-to-output Isolation voltage	-	-	-	1500	V DC	Functional Isolation
Other characteristics						
Remote on/off voltage	-	-	-	-	-	-
Low level	-	-0.7	-	1.2	V	-
High level	-	3.5	-	12	V	-
On/Off current	-	-	-	-	-	-
Low level	-	-	-	1.0	mA	-
High level	-	-	-	-	μA	-
Reliability characteristics						
Mean time between failures (MTBF)	-	-	2.5	-	Million hours	Telcordia SR332; 80% load; Airflow = 1.5m/s (300LFM); $T_A = 40^{\circ}\text{C}$ (104°F)

GAQ65D12

DC-DC Converter Technical Manual V1.7

Characteristic Curves

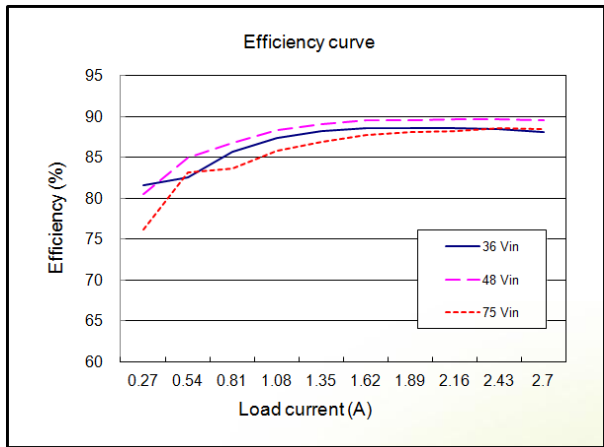


Figure 1: Efficiency ($T_A = 25^{\circ}\text{C}$ or 77°F)

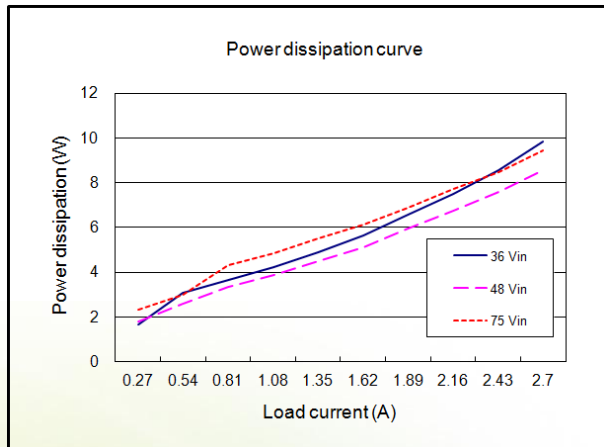


Figure 2: Power dissipation ($T_A = 25^{\circ}\text{C}$ or 77°F)

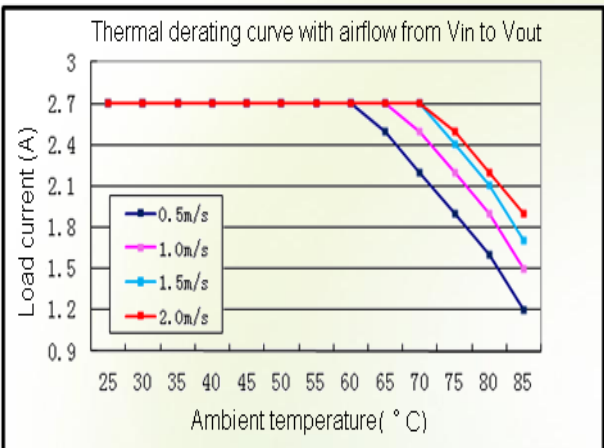


Figure 3: Thermal derating with airflow from V_{in} to V_{out} ($V_{in} = 48\text{ V}$; I_{o1} and I_{o2} change synchronous, see erect axis)

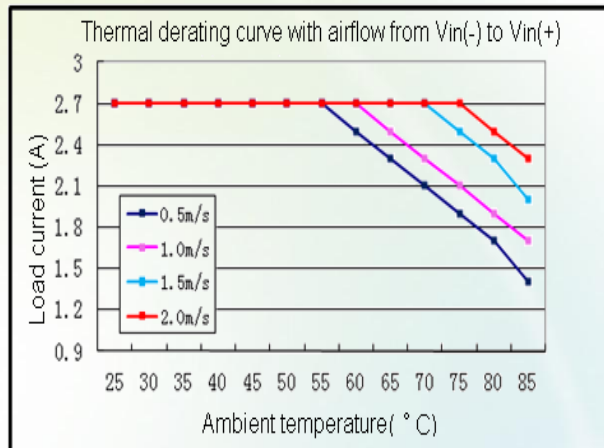


Figure 4: Thermal derating with airflow from $V_{in}(-)$ to $V_{in}(+)$ ($V_{in} = 48\text{ V}$; I_{o1} and I_{o2} change synchronous, see erect axis)

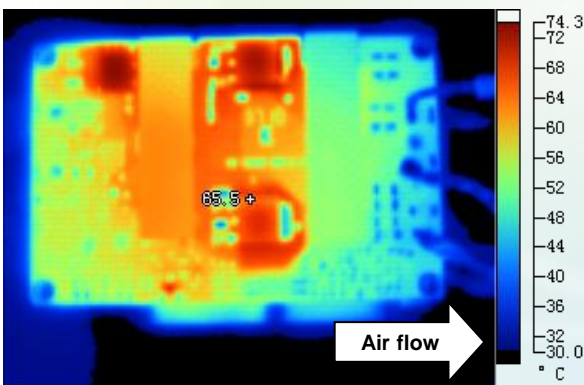


Figure 5: Thermal plot with airflow from V_{in} to V_{out} ($T_A = 25^{\circ}\text{C}$ (77°F); Airflow = 1 m/s (200 FLM); $V_{in} = 48\text{ V}$; Full load)

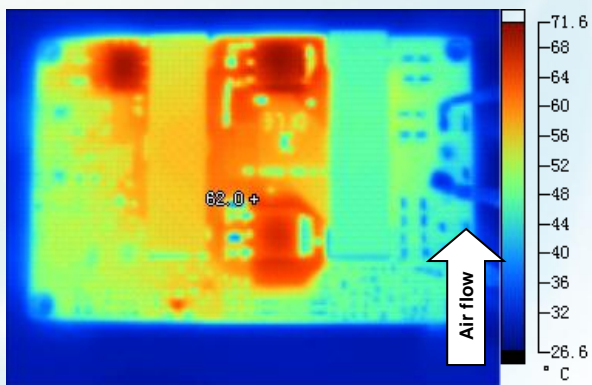


Figure 6: Thermal plot with airflow from $V_{in}(-)$ to $V_{in}(+)$ ($T_A = 25^{\circ}\text{C}$ (77°F); Airflow = 1 m/s (200 FLM); $V_{in} = 48\text{ V}$; Full load)

GAQ65D12

DC-DC Converter Technical Manual V1.7

Typical Waveforms



NOTE

1. During the test of input reflected ripple current, the input terminal must be connected to a 12 μH inductor and a 220 μF electrolytic capacitor.
2. Point B, which is for testing the output voltage ripple, is 25 mm (0.98 in.) away from the V_{out1} pin.
3. Point C, which is for testing the output voltage ripple, is 25 mm (0.98 in.) away from the V_{out2} pin.
4. C_{out1} and C_{out2} are capacitors that connect a 10 μF tantalum capacitor to a 0.1 μF ceramic capacitor in parallel.

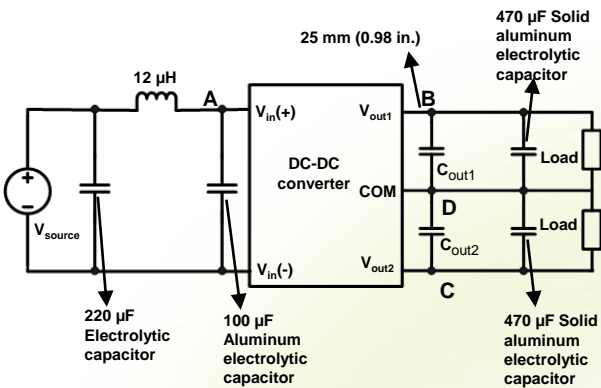


Figure 7: Test set-up diagram

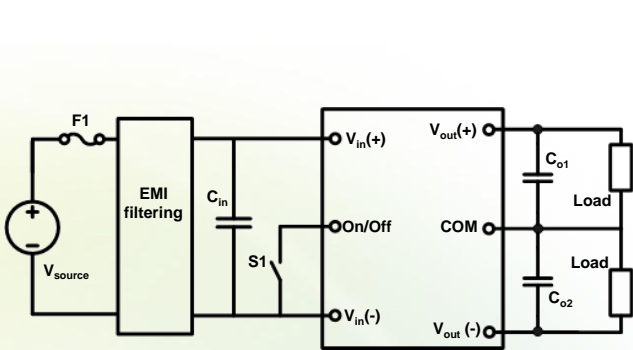


Figure 8: Typical circuit applications

F1: 5 A fuse (fast blowing)

C_{in} : The high-frequency, low equivalent series resistance (ESR) electrolytic capacitor (100 $\mu\text{F}/100\text{ V}$) is recommended.

C_{o1} : The 470 μF solid aluminum electrolytic capacitor is recommended.

C_{o2} : The 470 μF solid aluminum electrolytic capacitor is recommended.

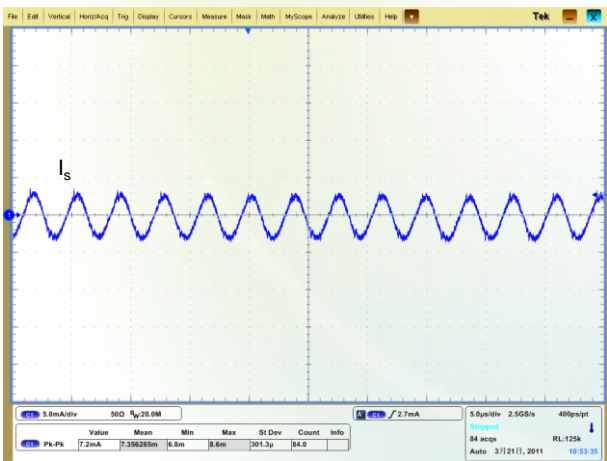


Figure 9: Input reflected ripple current
(for point A in the test set-up diagram, $V_{\text{in}} = 48\text{ V}$,
Output: +12 V/2.7 A, -12 V/2.7 A)

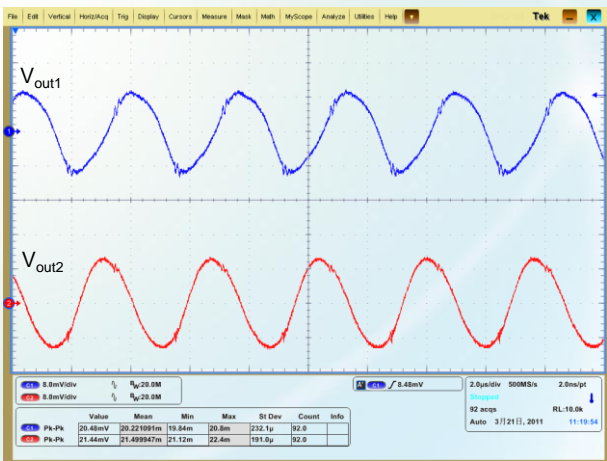


Figure 10: Output voltage ripple
(for point BD, CD in the test set-up diagram, $V_{\text{in}} = 48\text{ V}$,
Output: +12 V/2.7 A, -12 V/2.7 A)

GAQ65D12

DC-DC Converter Technical Manual V1.7

Typical Waveforms

Conditions: $T_A = 25^{\circ}\text{C}$ (77°F), $V_{in} = 48\text{ V}$.

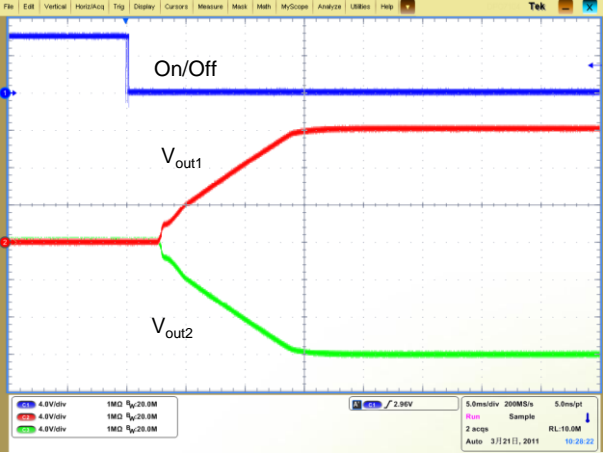


Figure 11: Startup from On/Off



Figure 12: Shutdown from On/Off

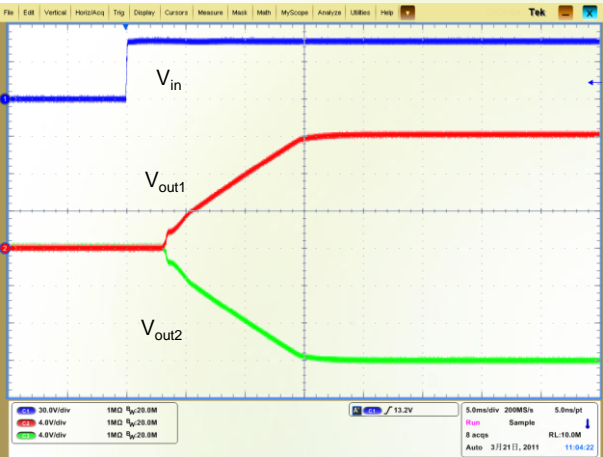


Figure 13: Startup by power on

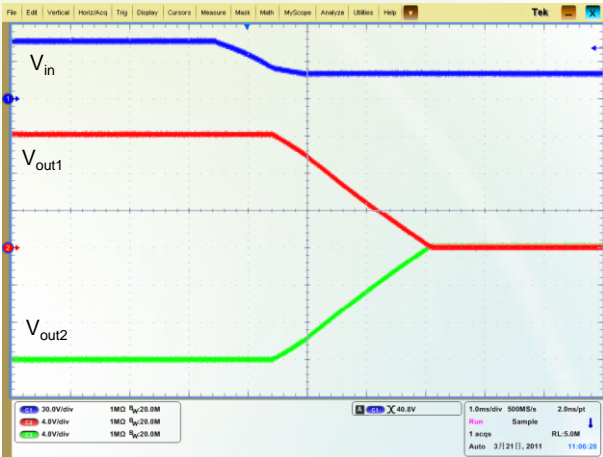


Figure 14: Shutdown by power off

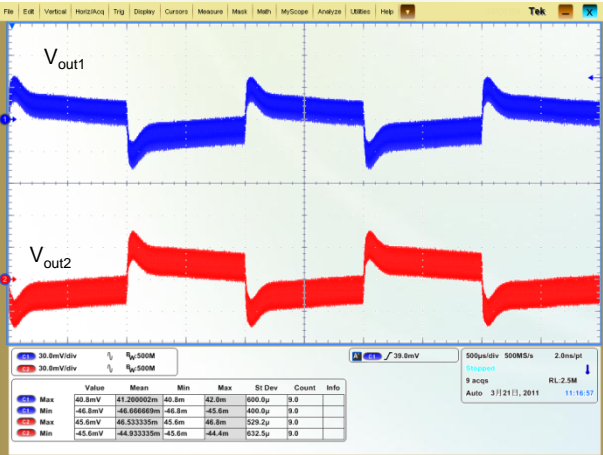


Figure 15: Output voltage dynamic response (Load: 25% - 50% - 25%, $di/dt = 0.1\text{ A}/\mu\text{s}$)

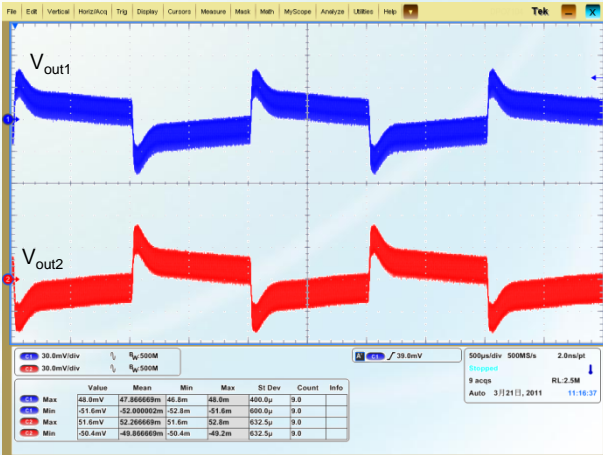


Figure 16: Output voltage dynamic response (Load: 50% - 75% - 50%, $di/dt = 0.1\text{ A}/\mu\text{s}$)

GAQ65D12

DC-DC Converter Technical Manual V1.7

Remote On/Off

Logic Enable	On/Off Pin Level	Status
Negative logic	Low level	On
	High level or left open	Off

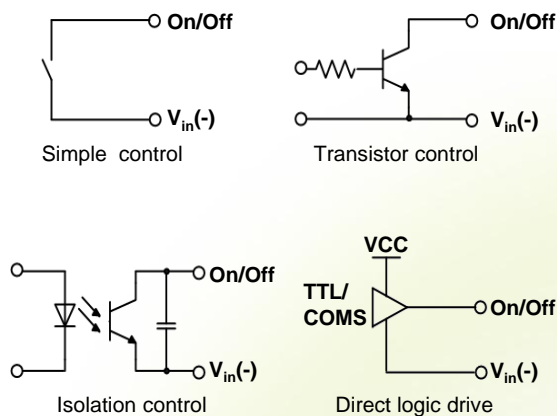


Figure 17: Various circuits for driving the On/Off pin

Output Voltage Trim

The 12 V output voltage can be adjusted according to the trim range specification by using the Trim pin.

Trim Up

The 12 V output voltage can be increased by installing an external resistor between the Trim pin and the COM pin.

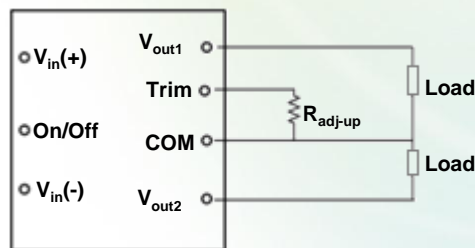


Figure 18: Configuration diagram for Trim up

The relationship between R_{adj-up} and V_{out1} :

$$R_{adj-up} = \frac{59.7}{2.485 \times V_{out1} - 30.3} - 5.1(k\Omega)$$



NOTE

1. If the Trim pin is not used, it should be left open.
2. Ensure that the actual output power does not exceed the maximum output power when raising the voltage.

Trim Down

The 12 V output voltage can be decreased by installing an external resistor between the Trim pin and the V_{out1} pin.

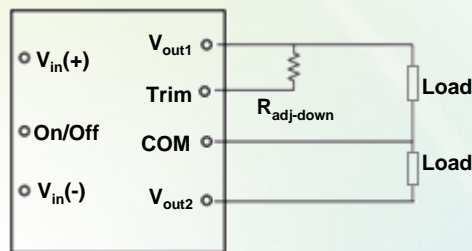


Figure 19: Configuration diagram for Trim down

The relationship between $R_{adj-down}$ and V_{out1} :

$$R_{adj-down} = \frac{47.82 \times V_{out1} - 119.56}{60.58 - 4.96 \times V_{out1}} - 5.1(k\Omega)$$

GAQ65D12

DC-DC Converter Technical Manual V1.7

Input Undervoltage Protection

The converter will shut down after the input voltage drops below the undervoltage protection threshold for shutdown. The converter will start to work again after the input voltage reaches the input undervoltage protection threshold for startup. For the Hysteresis, see the Protection characteristics.

Output Overcurrent Protection

The converter equipped with current limiting circuitry can provide protection from an output overload or short circuit condition. If the output current exceeds the output overcurrent protection set point, the converter enters hiccup mode. When the fault condition is removed, the converter will automatically restart.

Output Overvoltage Protection

When the voltage directly across the output pins exceeds the output overvoltage protection threshold, the converter will enter hiccup mode. When the fault condition is removed, the converter will automatically restart.

Overtemperature Protection

A temperature sensor on the converter senses the average temperature of the module. It protects the converter from being damaged at high temperatures. When the temperature exceeds the overtemperature protection threshold, the output will shut down. It will allow the converter to turn on again when the temperature of the sensed location falls by the value of Overtemperature Protection Hysteresis.

MTBF

The MTBF is calculated according to the Telcordia, SR332 Method 1 Case3.

Recommend Reverse Polarity Protection Circuit

Reverse polarity protection is recommended under installation and cabling conditions where reverse polarity across the input may occur.

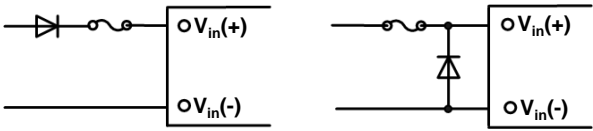


Figure 20: Recommend reverse polarity protection circuits

Recommended Fuse

The converter has no internal fuse. To meet safety and regulatory requirements, a 5 A fuse is recommended.



NOTE

The fuse current should be 1.5 to 2 times the maximum operating current in actual use.

EMC

For the acceptance standard, see the *DC-DC Converter EMC Acceptance Manual*.

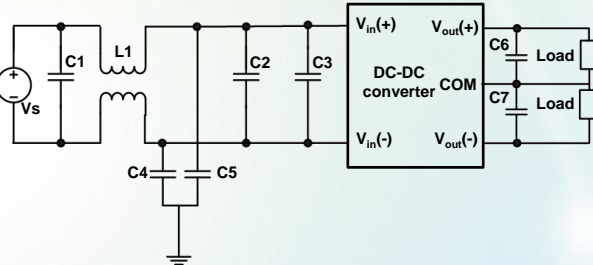


Figure 21: EMC test set-up diagram

- C1: Surface mount device (SMD) ceramic capacitor (100 V/1000 nF/X7R/1210)
- C2: SMD ceramic capacitor (100 V/100 nF/± 10%/X7R/1206)
- L1: Common-mode inductor (single phase, 809 μH/± 25%/9.7 A/R5K/ 28 mm x 26 mm x 12.7 mm [1.10 in. x 1.02 in. x 0.50 in.]). The chip component with the same specifications can also be used.
- C4, C5: High-pressure resistant chip ceramic capacitor (100 nF/1000 V/X7R/1210)
- C3: Aluminum electrolytic capacitor (100 μF)
- C6: Solid aluminum electrolytic capacitor (470 μF)
- C7: Solid aluminum electrolytic capacitor (470 μF)

GAQ65D12

DC-DC Converter Technical Manual V1.7

Qualification Testing

Parameter	Units	Condition
High Accelerated Life Test (HALT)	4	Lowest operating temperature: -60°C (-76°F); highest operating temperature: 120°C (248°F); vibration limit: 40 G
Thermal Shock	32	500 temperature cycles between -40°C (-40°F) and +125°C (+257°F) with the temperature change rate of 20°C (68°F) per minute; Lasting for 30 minutes both at -40°C (-40°F) and +125°C (+257°F)
Temperature Humidity Bias (THB)	16	Maximum input voltage; 85°C (185°F); 85% RH; 1000 operating hours under lowest load power
High Temperature Operation Bias (HTOB)	16	Rating input voltage; air flow:0.5 m/s (100 FLM) to 5 m/s (1000 FLM); 1000 operating hours under 50% - 80% load power; air temperature:45°C - 55°C(113°F - 131°F)

Thermal Consideration

Thermal Test Point

Sufficient airflow should be provided to ensure reliable operating of the converter. Therefore, thermal components are mounted on the top surface of the converter to dissipate heat to the surrounding environment by conduction, convection and radiation. Proper airflow can be verified by measuring the temperature at the thermal test point.




Figure 22: Thermal test point



NOTE

The temperature at the thermal test point on the converter cannot exceed 125°C (257°F). Otherwise, the converter will be protected against overtemperature and will not operate properly.

Power Dissipation

The converter power dissipation is calculated based on efficiency. The following formula reflects the relationship between the consumed power (P_d), efficiency (η), and output power (P_o):
$$P_d = P_o(1 - \eta) / \eta$$

Thermal Testing Setup

Test board: D x W=254 mm x 254 mm [10 in. x 10 in.], 1oz, 4 layers.

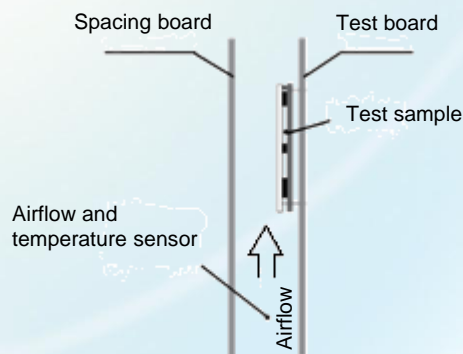


Figure 23: Wind tunnel test setup

GAQ65D12

DC-DC Converter Technical Manual V1.7

Mechanical Consideration

Installation

Although the converter can be mounted in any direction, free airflow must be taken.

Soldering

The converter is compatible with standard wave soldering techniques. For wave soldering, the converter pins should be preheated for 20 to 30 seconds at 110°C (230°F), and wave soldered at 260°C (500°F) for less than 7 seconds.

For hand soldering, the iron temperature should be maintained at 350°C (662°F) to 420°C (788°F) and applied to the converter pins for less than 10 seconds.

The converter can be rinsed using the isopropyl alcohol (IPA) solvent or other proper solvents.

HUAWEI TECHNOLOGIES CO., LTD.
Huawei Industrial Base Bantian Longgang
Shenzhen 518129
People's Republic of China
www.huawei.com